

PRODUCT DESCRIPTION


This polyethylene surface protection film contains an acrylic adhesive and offers temporary protection to a wide range of surfaces, including metal, plastics and aluminum. It is also effective in protecting semi-smooth surfaces such as hardwood and ceramic tile floors from dirt, spills, dust, construction debris, and damage. It is resistant to tears and punctures from sharp objects. Ideal for use in high-traffic areas in construction building and renovation projects.

APPLICATIONS

- Construction and Remodeling: Protects windows, doors, and glass from paint, mortar, and debris.
- Flooring: Shields hardwood and ceramic tiles from traffic and damage.
- Metal Fabrication: Safeguards stainless steel and aluminum plates during deep drawing, machining, and transit.
- Industrial Applications: Protects finished surfaces of appliances and machinery.

FEATURES & BENEFITS

- Durable and strong
- Tear and puncture resistant
- Clean and easy residue-free removal
- Protects against scratches, dust and overspray

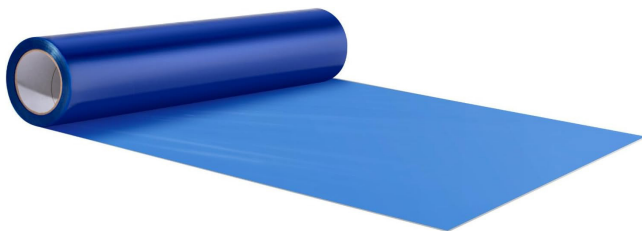

PHYSICAL PROPERTIES

TECHNICAL PROPERTY	VALUES
Backing	LDPE
Adhesive	Acrylic type with solvent
Total Thickness	45±5 micron
180°C Peeling Strength	400g±10%/25mm
Elongation	≥1.0KN/M
Elongation at Break %	≥300%
Temperature Resistance	60°C, 160 hours, no residue glue after removal
Core I.D.	3" (76mm±1)

STANDARD WIDTHS

1" up to 48"
Custom widths available

STANDARD LENGTH

600 ft (182 m)

AVAILABLE COLOURS

Blue

PRODUCT RECOMMENDATIONS

The products should be stored at room temperature, away from moisture and heat sources.

It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied is clean, dry, and free from grease and oil.

Users are advised to conduct tests prior to application to ensure the tape's suitability for their specific needs and techniques.

The above properties and results obtained refer to the average values of laboratory testing carried out on the sample Lowry® product. Lowry® does not guarantee testing accuracy and makes no guarantee of product performance, safety, or suitability, either expressed or implied, when used alone or in combination with other products. It is essential as with all pressure sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease and oil. Lowry® strongly urges users to undertake independent testing in order to verify the suitability of the product for whatever intended use. Lowry® assumes no responsibility for any damage or injury sustained as a result of the use of its products.