

# MMYP-1

**Lowry**  
The Tape Specialists

## METALIZED POLYESTER FILM TAPE

### PRODUCT DESCRIPTION

A 1 mil metalized polyester film with a brilliant, vibrant, mirror-like finish, coated with an aggressive, long lasting acrylic adhesive. These tapes have excellent chemical and thermal stability.

Applications include: reflective shielding; industrial and graphic arts; decorative trim, automotive trim, nameplates, electric appliances, advertising displays; suitable for micro film splicing; also can be used in photo sensing applications to detect splices and to facilitate roll changeovers - recommend test sampling first.

### PHYSICAL PROPERTIES

Adhesive:	Acrylic
Total Thickness:	2.1 mil
Adhesion to Steel:	45 oz/in
Tensile Strength:	24 lbs/in
Elongation:	100%
Temperature:	Up to 300°F
Core I.D.:	3" plastic core

### STANDARD WIDTHS


12 mm, 18 mm, 24 mm, 36 mm, 48 mm  
Custom widths also available

### STANDARD LENGTHS

66 metres

### RECOMMENDED STORAGE CONDITIONS

The product should be stored at room temperature and be kept away from wet and/or heat source.

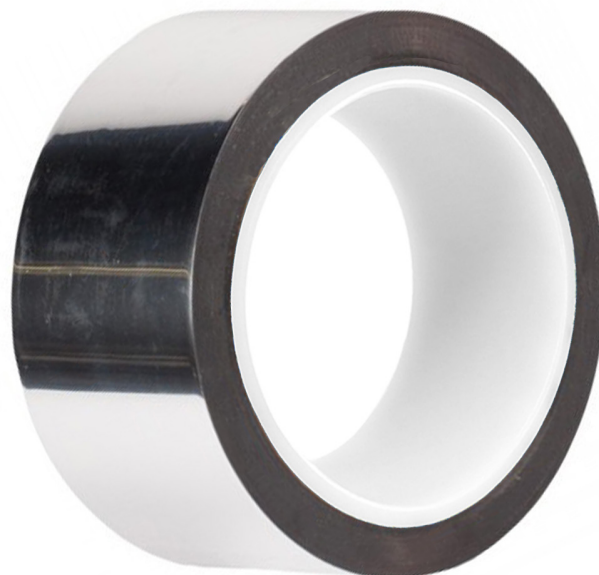

The above properties and results obtained refer to the average values of laboratory testing carried out on the sample Lowry® product. Lowry® does not guarantee testing accuracy and makes no guarantee of product performance, safety, or suitability, either expressed or implied, when used alone or in combination with other products. It is essential as with all pressure sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease and oil. Lowry® strongly urges users to undertake independent testing in order to verify the suitability of the product for whatever intended use. Lowry® assumes no responsibility for any damage or injury sustained as a result of the use of its products.